


M. I. HEAD THERMOCOUPLES

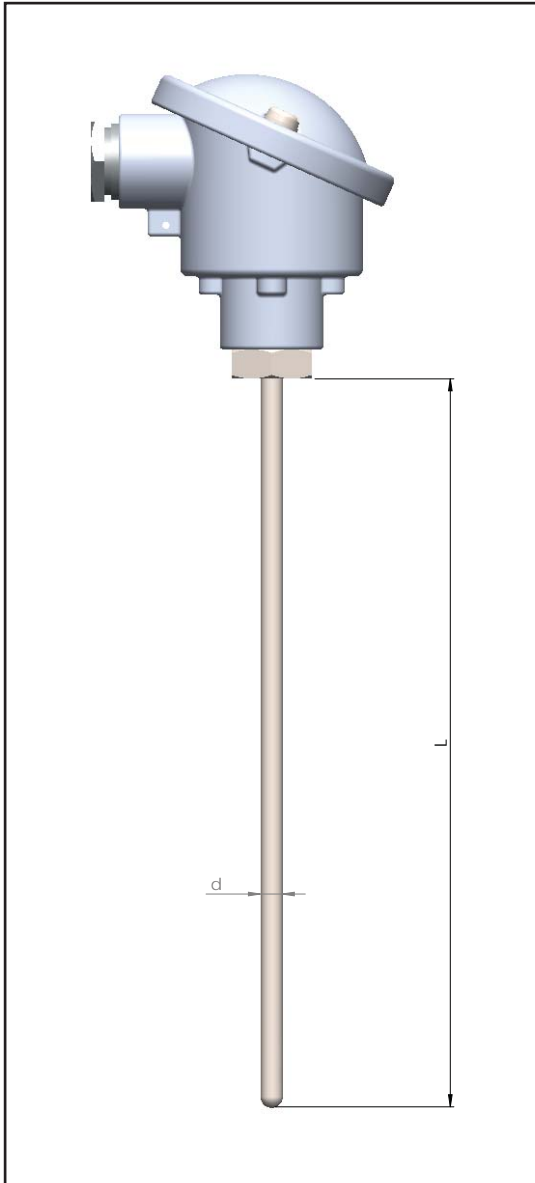

A) Thermocouple Type:	K / N / T / J / E
A1) Range:	see Thermocouples Section
B) Number of Sensor:	Single, Double, Triple
B1) Hot Junction Type:	Ungrounded, Grounded, Exposed
B2) Accuracy:	Class 1 / 2 <i>according to IEC 60584 standard</i>
B3) Color Code:	ANSI / DIN / IEC
C) Connection Head Type:	<i>see Connection Heads Section</i>
D) Sheath Material:	SS 304 / SS 316 / INCONEL 600 <i>other on request</i>
D1) Sheath Diameter (d):	0,5 / 1 / 1,5 / 2 / 3 / 4,5 / 6 / 8 / 12,7 mm
D2) Sheath Length (L):	200mm STD <i>other on request</i>
E) Option:	Extension Nipple Union Compression Fitting
F) Thermowell:	<i>see Thermowells Section</i>
G) Transmitter:	4..20 mA HART Profibus Foundation Fieldbus Foundation