


M. I. HEAD THERMORESISTANCES

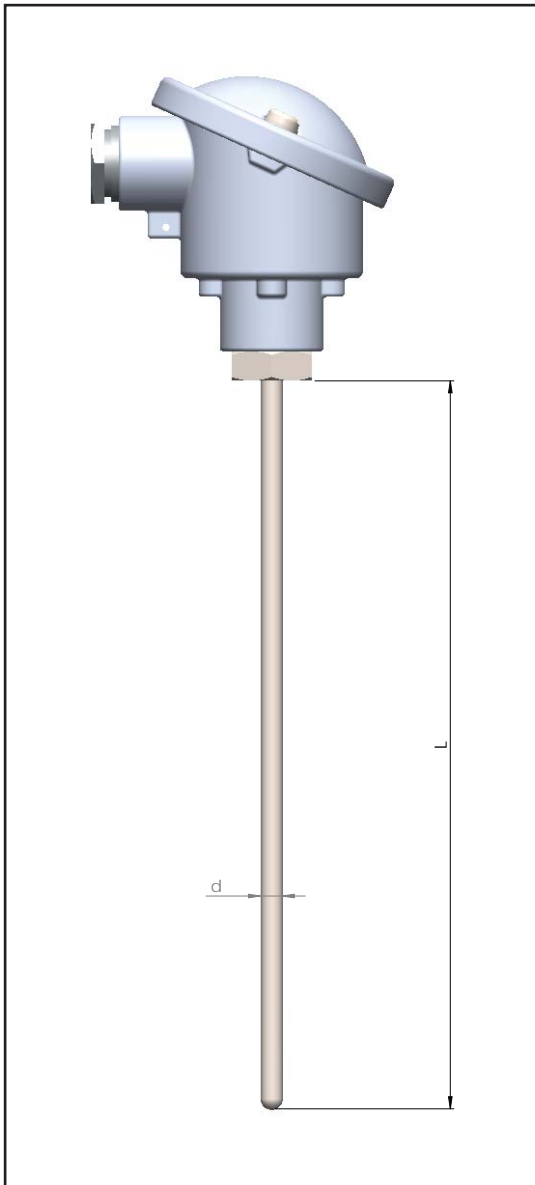

A) RTD Type:	Pt100 / 500 / 1000 Ω a 0°C Ni100 / 200 Ω a 0°C
A1) Range:	-50..+400°C
B) Number of Sensor:	Single, Double, Triple
B1) Electrical Connection:	2 / 3 / 4 wires
B2) Accuracy:	Class AA / A / B / BB <i>according to IEC 60751 standard</i>
C) Connection Head Type:	<i>see Connection Heads Section</i>
D) Sheath Material:	SS 304 / SS 316 / INCONEL 600 <i>other on request</i>
D1) Sheath Diameter (d):	2 / 3 / 4,5 / 6 / 8 mm
D2) Sheath Length (L):	200mm STD <i>other on request</i>
E) Option:	Extension Nipple Union Compression Fitting
F) Thermowell:	<i>see Thermowells Section</i>
G) Transmitter:	4..20 mA HART Profibus Foundation Fieldbus Foundation