


M. I. THERMORESISTANCE INSERT

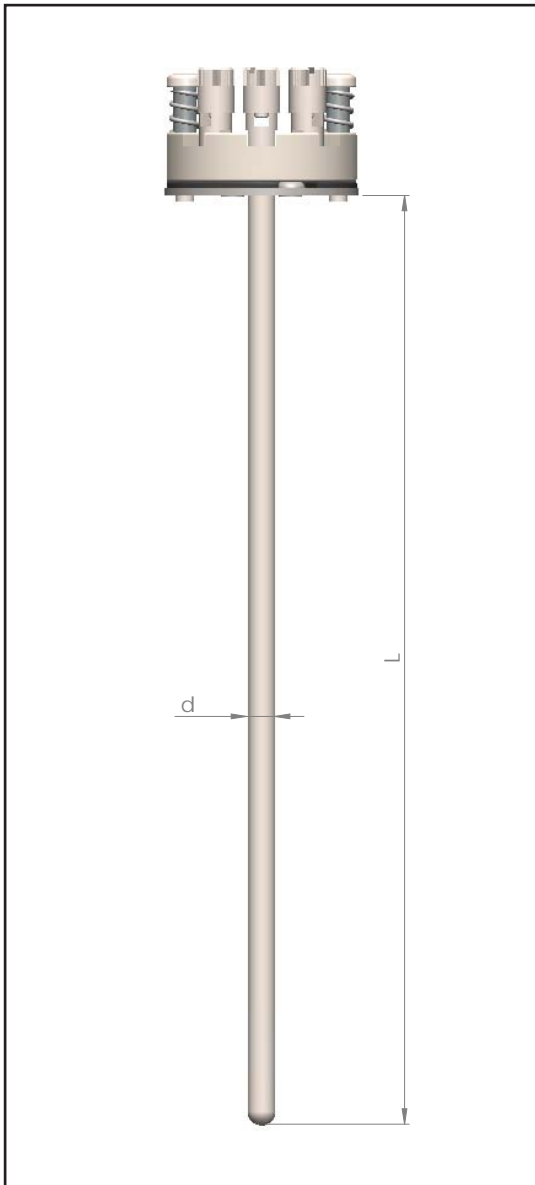

A) RTD Type: Pt100 / 500 / 1000 Ω a 0°C

Ni100 / 200 Ω a 0°C

A1) Range: -50..+400°C

B) Number of Sensor: Single, Double, Triple

B1) Electrical Connection: 2 / 3 / 4 wires

B2) Accuracy: Class AA / A / B / BB
according to IEC 60751 standard

C) Sheath Material: SS 304 / SS 316 / INCONEL 600
other on request

C1) Sheath Diameter (d): 2 / 3 / 4,5 / 6 / 8 mm

C2) Sheath Length (L): 200mm STD
other on request