


# THERMORESISTANCE with CABLE

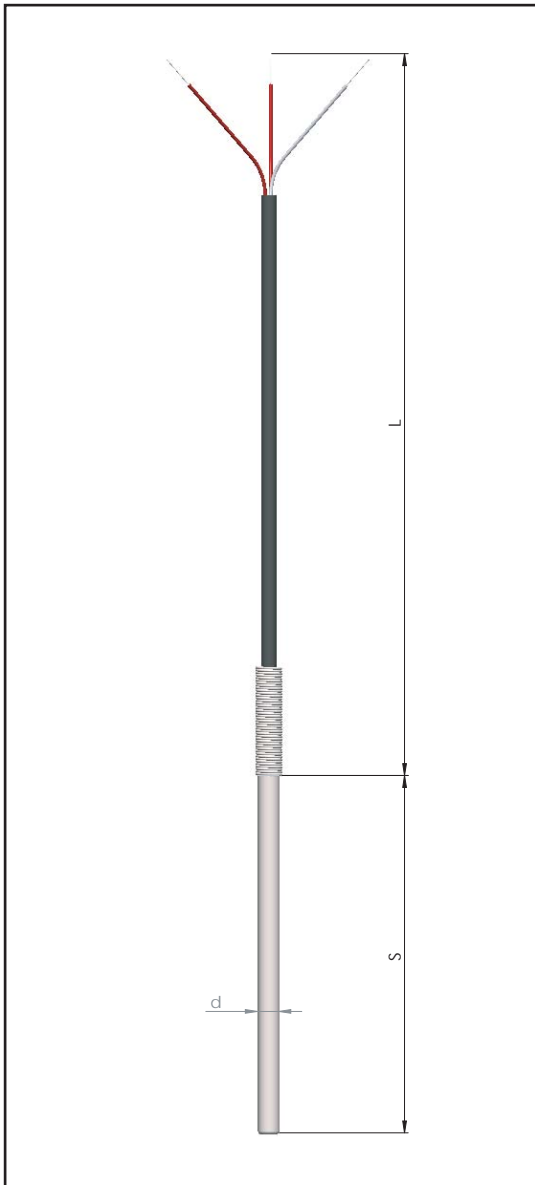

**A) RTD Type:** Pt100 / 500 / 1000  $\Omega$  a 0°C

Ni100 / 200  $\Omega$  a 0°C

**A1) Range:**

-50..+400°C

---

**B) Number of Sensor:** Single, Double, Triple

**B1) Electrical Connection:** 2 / 3 / 4 wires

**B2) Accuracy:**

Class AA / A / B / BB

*according to IEC 60751 standard*

---

**C) Sheath Material:**

SS 304 / SS 316 / INCONEL 600

*other on request*

**C1) Sheath Diameter (d):**

*dependent on tubing  $\emptyset$*

**C2) Sheath Length (S):**

100mm STD

*other on request*

---

**D) Cable Type:**

*see Cable Section*

**D1) Cable Length (L):**

1000mm STD

*other on request*

---

**E) Cable Type:**

Compression Fitting